

— INDOOR TOTEM CLASSIC —

INDOOR TOTEM CLASSIC



1. IPS PANEL



Industrial grade IPS technology accurately displays image quality and colour depth with no fall-off in colour accuracy.

2. 4K DISPLAY



The 4K Ultra HD display delivers incredible image quality with four times resolution higher than Full HD.

3. WIDE VIEWING ANGLE




These displays provide fantastic image quality with a remarkable viewing angle of 178° in both landscape and portrait.

4. SCROLLING TEXT



You can display a "ticker tapy" style scrolling text message along the bottom of the screen.

5. SURFACE PLASMA TREATMENT

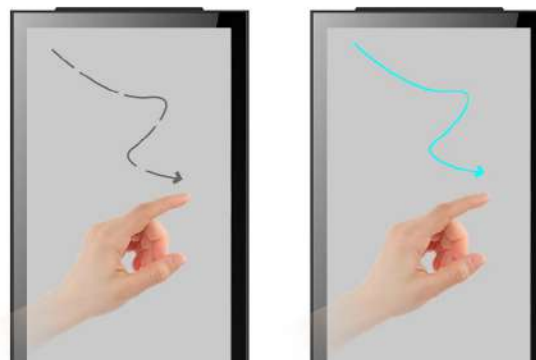

The oleophobic coating makes the glass front more resistance to oil and water residue left by fingerprint marks and makes touch gestures smoother.

6. 10 POINT PCAP / IR TOUCH



Manipulate images, zoom in an out as well as perform many other touch gestures; Multiple users interacting with the screen at one time.

7. INTEGRATED SPEAKERS



10w 8Ω ×2
Integrated speakers

Integrated with two stereo speakers for audio element requirement.

8. FREE SCHEDULING SOFTWARE



Playlist can be scheduled for displaying different content at different times of the day.

9. POWER TIMER



The screen can be set to automatic daily or weekly timing switches on and off.

10. 24/7 USAGE



The industrial grade panels are able to be in constant use 24/7 for over 60,000 hours.

11. ANDROID OR WINDOWS OS



Built-in Android 7.1 operating system and Windows 10 operating system options. You can also use your media player if required.

12. NETWORK REMOTE CONTROL




LAN, Wi-Fi, 4G network connection are available. The playlist can be remotely updated over the internet.

DESIGN COMPARISON

AL1900




Embedded base



Side strip profile

Curved profile



UT1900



Triangle base



Flat profile

Support leg base




IS1900



No screws are exposed in appearance

PRODUCT SIZE



SIZE REFERENCE:
55 INCH

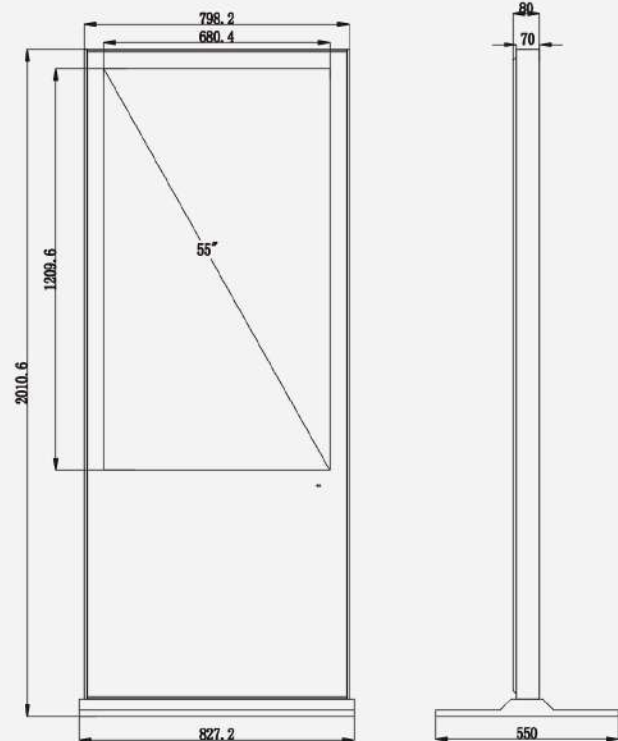

AL1900

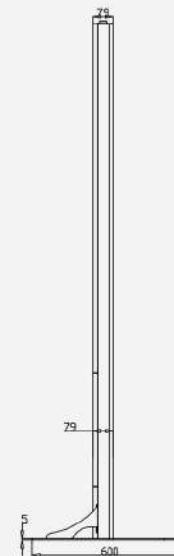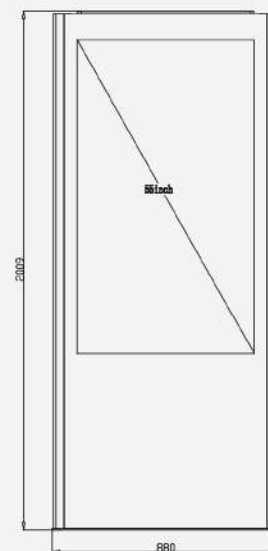

IS1900

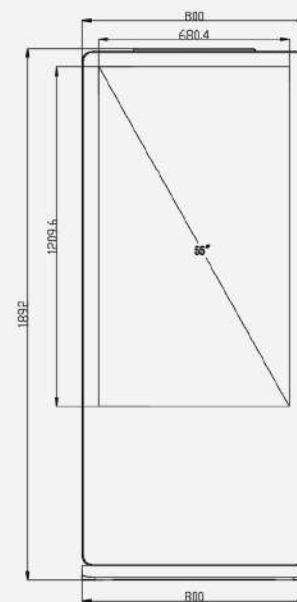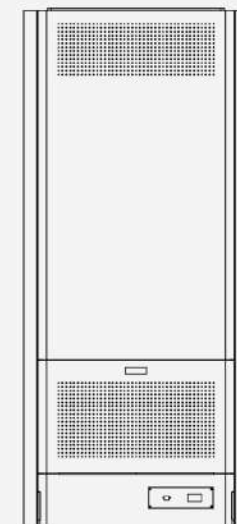

UT1900



OTHER DESIGN OPTION



AL1900



IS1900



UT1900



U2020-J



U2020-S



U2020-M



U2020-F

CUSTOMIZATION



•white•



•printer•



•universal wheels•



•luminous LED logo•



•customized color•

INDOOR TOTEM CLASS SERIES

ITEM	DETAILS	TECHNICAL PARAMETERS				
Hardware data	Size	32inch	43inch	49inch	55inch	65inch
	Display area (mm)	698.4*392.85	941.1*529.4	1084.8x610.2	1209.6x680.4	1428.48x803.52
	Referent dimension(H*W*T mm)	1706*500*75	1807*634*75	1902*710*75	1892*800*75	2150*930*90
	Resolution	1920x1080 / 3840x2160				
	Brightness	350 cd/m ² / 500 cd/m ² / 700 cd/m ² / 1000 cd/m ²				
	Viewing angle	178° (H) / 178° (V)				
	Contrast ratio	1400:1				
	Shell material	aluminum profile,metal plate,tempered safety glass				
Power supply	Spearker	2X8Ω5W				
	Switch power	110-240VAC@ 50/60Hz				
Power consumption	Max Power consumption	40W	55W	60W	80W	100W

ITEM	DETAILS	TECHNICAL PARAMETERS
Android version	Motherboard	RK3288/ RK 3399
	CPU	Cores:4; Basic frequency:1.8 GHz; Cortex A17 / Dual Cortex-A72 big core+quad Cortex-A53 small core 64-bit CPU
	Operating System	Android 5.1/ 7.1
	Graphics	Integrated GPU ARM Mali-T764 / Quad core Arm mali-T860Mp4
	Memory	2G
	Storage	16G
	RJ45 LAN interface	100M/1000M
	USB	4 USB 2.0 / 2 USB 3.0
	Player Software	content management system
	Audio support	Intergrated
Windows version	Output interface	HDMI *1
	Motherboard	H110
	CPU	Intel i5 ≥6th generation(i3 & i7 for option)
	Operating System	Windows 10 Pro
	Graphics	Intel HD Graphics
	Memory	4G RAM
	Storage	120G SSD
	RJ45 LAN interface	100M/1000M
	USB	USB*1, SD card*1
	Player Software	To be specified by the client
Windows version	Audio support	Intergrated
	Output interface	HDMI*1, VGA*1

ITEM	DETAILS	TECHNICAL PARAMETERS
Standalone version	Motherboard	SX-260
	CPU	HD video decoding chip
	Operating System	uCOS
	Memory	DDR 128MB
	Storage	NAND Flash 16G
	Video format	MPEG1, MPEG2, MPEG4, H264, WMV
	USB	USB*1, SD card*1
Driver board version	Input interface	HDMI*1,USB*1
	USB	none
	Audio support input interface	PC audio, earphone input HDMI*1,VGA*1,DVI*1 / HDMI*1,DVI*1,VGA*1,DP*1
Application Environment	Operating temperature	0°C ~ +40°C
	Storage temperature	-20°C ~ +60°C
	Humidity	10-80% RH Non-condensing
Options	WiFi access point	Yes
	Cellular router	3G or 4G
	Touchscreen	capacitive touch
	LED backlit company logo	Yes

PRODUCTION PICTURES





GLOBAL 7X24 SERVICE



REMOTE TECHNICAL
SUPPORT



SUPPORT CUSTOMER'S
IMPORTANT ACTIVITIES




FREE TECHNICAL
TRAINING



VISIT VIP CUSTOMERS
REGULARLY



1 YEARS WARRANTY

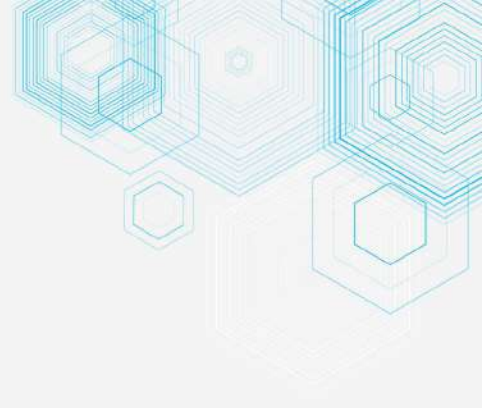

YOU ARE NOT ONLY A CLIENT,
YOU ARE OUR **PARTNER**